BL/TZ INFORMATION

No.2020-0192 2020/7/15 Blitz Co., Ltd.

0

6.0

BS

-65 **~** -15

2WD Gasoline


Additional Applications



Suspension Kit equipped with Full Length Adjustability and 32 Levels of Damping Force Adjustments. Wide range adjustability can finely balance driving performance and ride quality to meet your needs from the street to the circuit.

(Vehicle)	(Model Year)	(Model)	(E/G Model)	(MSRP w/tax)	(MSRP)	(Code No.)	(JAN Code)
TOYOTA							
HARRIER	20/06-	MXUA80	M20A-FKS	¥187,000	¥170,000	92532	4959094925323



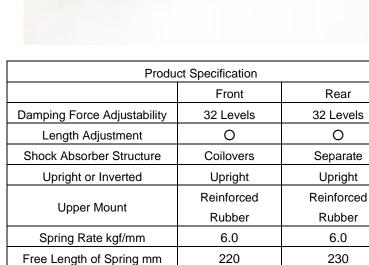

Spring TypeX

Ride Height Adjustability mm

Remarks

ST

-95 **~** 0

Front: -49mm Down / Rear: -46mm Down

*Abbreviation for Spring Types 「ST:ID62 Straight Spring」, 「BS: Barrel or Tapered, Vehicle Specific Springs」 XAdjustability in ride height may vary between vehicles.

BL/TZ INFORMATION

Information on Verification Test Vehicle

This product has been tested on the following vehicle.

Data taken from in house measurements.

Measurements for the vehicle height may differ depending on the vehicle's grade and options.

The distance from the ground to fender may differ even when your vehicle is set at the same measurements as the test vehicle.

Please use the following data as a reference and adjust your vehicle height accordingly.

(D	DAMPER仕様·車両情報 AMPER specification, vehicle information	2)			
(D	スプリングデータ (Spring Data)				
スプリングバネレート[kgf/mm] (Spring Rate)	6.0	6.0			
スプリング自由長[mm] (Free Length of Spring)	220	230			
スプリング内径【】は外径 (Spring Inner Diameter【Outer】)	φ 62	φ 62 – (φ 115) – φ 62			
	減衰カデータ (Damping Force Data)				
減衰力調整 〔開発時減衰〕 (Damping force adjustment	32 [16]	32 [16]			
	セッティングデータ (Damping Force Data)				
地面~フェンダー[mm] (Ground~Fender [mm])	758	765			
純正からのダウン量[mm] (Difference from Stock [mm])	-49	-46			
最大車高調整範囲〔mm〕 (Maximum height adjustment range	−95 ~ 0	-65 ~ -15			
レバー比 (Lever Ratio)	1.0	ショック: 0.9 スプリング: 1.2 (Shock Absorber) (Spring)			
	テスト車両情報 (Test vehicle information)				
車名/型式/グレード (Vehicle Name/Model/Grade)	HARRIER / MXL	JA80 / G"Leather Package"			
	フロント (Front)	リア (Rear)			
車 重[kg] (Vehicle Weight)	940	650			
タイヤサイズ (Tire Size)	225/60 R18	225/60 R18			
ホイールサイズ (Wheel Size)	18インチ × 7.0J インセット 35 (INCHES) (INSET)	18インチ × 7.0J インセット 35 (INCHES) (INSET)			
	アライメントデータ (Alignment Data)				
トー 〔純正値〕 (Toe [Stock Measurements])	+0° 03'[2.5 ± 2.0mm]	+0° 07'[2.6 ± 2.0mm]			
キャンバー 〔純正値〕 (Camber [Stock Measurements])	-2° 02' [-0° 20' \pm 0° 45']	-2° 20' [-1° 05' \pm 0° 45']			
キャスター 〔純正値〕 (Caster [Stock Measurements])	+4° 43' [+5° 00' ± 0° 45']	-			
	最低地上高データ (Vehicle Height Data)				
最低地上高場所 〔数值mm〕 (Minimum ground elevation 〔Numerical data mm〕)	燃料タンク下パネル [144mm]				

■Precautions During Installation

- •Compatibility has been checked for MXUA80 (Gasoline) 2WD models.
- •Rear damping force adjustment dials are located inside the wheel well.

Therefore the wheels must be removed in order to make adjustments.

■Other Remarks

- •Cornering performance has been improved by limiting vehicle role.
- •Make adjustments to the damping force to optimize ride quality depending on number of passenger and road condition.
- •Increase the damping force for greater stability during high speeds.
- •Lower your vehicle for a stylish look.