

Additional Application for the Power Con
has been confirmed for the WRX S4



[Click here for more information on Power Con](#)



Product Characteristics

- By optimizing the boost pressure for turbo vehicles, more power can be obtained.
- Settings are taken vehicle specifically.
- Boost is increased within the level of the stock ECU to minimize the burden on the vehicle.
- Does not require any additional wiring modifications due to the plug and play design.
- The product can be easily installed since all connections are made within the engine room.
- Does not require any complicated setting procedures and power is immediately increased after installation.
- Includes all necessary parts for installation.


Information on Compatible Vehicles										
(Vehicle)	(Model Year)	(Model)	(E/G Model)	T/M	(Stock)	PowerThro	(MSRP w/tax)	(MSRP)	(Code No.)	(JAN Code)
SUBARU										
WRX S4	2021/11-	VBH	FA24	CVT	259.8PS	279.0PS (+19.2PS)	¥38,500	¥35,000	BPC33	4959094157335

- ※ Depending on the individual, the sensation for the improved acceleration, response, and power may differ.
- ※ The POWER UP values listed on the product information shows the difference in output between vehicles equipped with Power Con and stock. All measurements taken by in house chassis dynamo.
- ※ Output may differ depending on the vehicle. Please keep in mind that these values are only for reference.
- ※ The product can be equipped along with the BLITZ AIR FILTER Series and AIR CLEANER Series.
Has not been tested with air filter, air cleaners from other manufacturers.
- ※ Cannot be equipped on vehicles with rewritten ECU (Including BLITZ TUNING ECU), replaced ECU, or vehicles equipped with electronic parts attached to the boost sensor or air flow sensor.

Optional Parts				
Product Name	Code No.	MSRP w/tax	MSRP	Remarks
Thro Con-Power Con Connection Harness	14797	¥3,300	¥3,000	Install this harness to link the Thro Con and Power Con together.

■ Power Graph

○ WRX S4 : Increase in Maximum Output 19.2PS . Increase in Maximum Torque 32.2N.

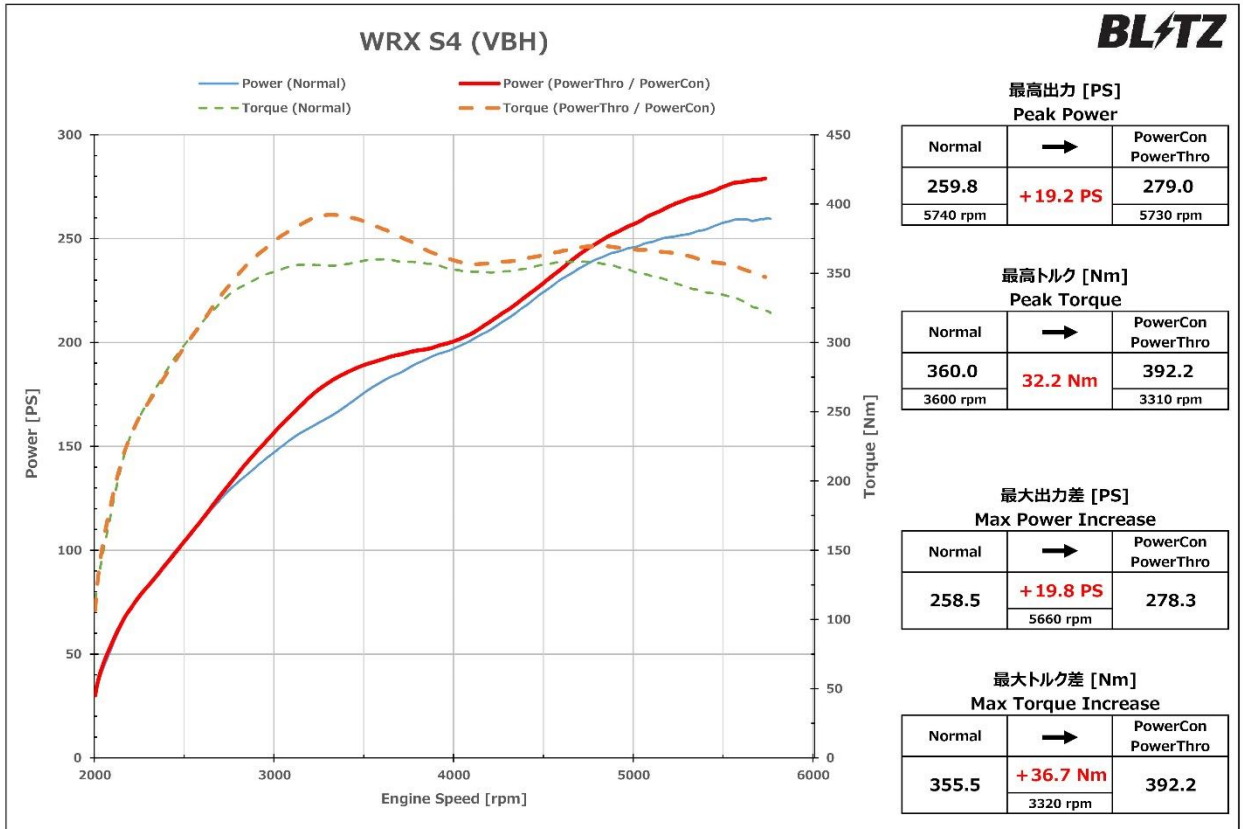

※グラフ、データは弊社シャーシダイナモでの計測事例です。車両ならびに装着部品、燃料などにより個体差があります。

[Click here for more data on Power Con](#)